

HDMI Splitter User Manual


Special Notification

Before using this product, please read this manual carefully.
Please keep this manual for future reference.
The company may change the function of product without notice.

Product Description


2 Ports HDMI splitter duplicates one way HDMI source to two displays.
Its supported features including up to 10.2Gbps data rate, 12bit deep color, 3D, Lipsync and high definition lossless audio. This HDMI splitter support 1080P PC resolution. It is best for use to transmute one HDMI signal to two displays.

Interface Description

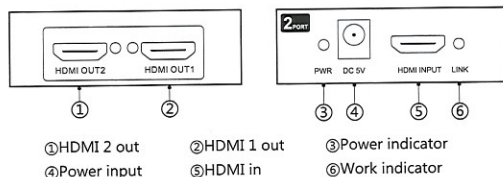

(To prevail in kind)

Connection Diagram

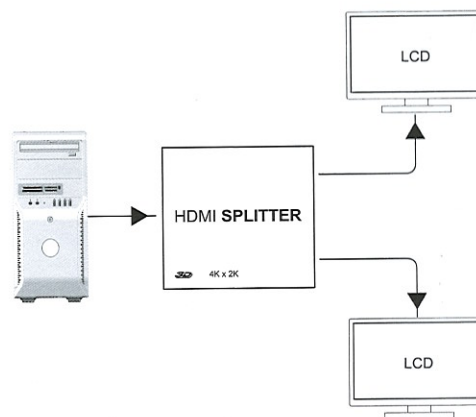

Use Instructions

1. With a HDMI cable, connect the HDMI signal source to the input port of the distributor;
2. With HDMI cable, the output of the distributor is connected to the monitor;
3. Connected power supply;
4. Can work normally.

Function

- 1 HDMI signal input into 2 HDMI signal output;
- Support 3D video format;
- Support 1080P@60Hz signal input and output;
- Support 24/30/36 bit;
- Support for HDCP;
- Supports 3840x2160/30Hz resolution;
- Audio format LPCM7.1/DTS/DOLBY-AC3/DSD/DTS-HD/Dolby-trueHD.

Product Specifications

Input interface: HDMI×1(Female)

Output interface: HDMI×2(Female)

Power supply interface: DC-005×1(Female) External USB power supply

HDMI input resolution: 480I , 480P , 576I , 576P , 720I , 720P , 1080I , 1080P , 4K

HDMI output resolution: 480I , 480P , 576I , 576P , 720I , 720P , 1080I , 1080P , 4K

Support power supply: DC 5V/0.5A

Working temperature: 0~40°C

Shell: Metal Case + Spray screen

Product size: 65×61×21mm

Packing: packing box

The matters needing attention of installation

In order to ensure the reliable performance of the equipment and the safety of the user, please observe the following matters during the process of installation, use and maintenance.

■ Please do not use this product in the following places: the place of dust, soot and electric conductivity dust, corrosive gas, combustible gas; the place exposed to high temperature, condensation, wind and rain; the occasion of vibration and impact. Electric shock, fire, wrong operation can lead to damage and deterioration to the product, either;

■ Should avoid wiring and inserting cable plug in charged state, otherwise it is easy to cause the shock, or electrical damage;

■ The installation and wiring should be strong and reliable, contact undesirable may lead to false action;

■ This product grounds by the grounding wires. To avoid electric shocks, grounding wires and the earth must be linked together. Before the connection of input or output terminal, please make sure this product is correctly grounded;

■ Only after cutting down all external power source, can install, wiring operation begin, or it may cause electric shock or equipment damage;

■ Please do not dismantle the equipment, avoid damaging the internal electrical component.