


BN-KJ6-U0

Category 6 (CAT.6) UTP Keystone Jack

beek

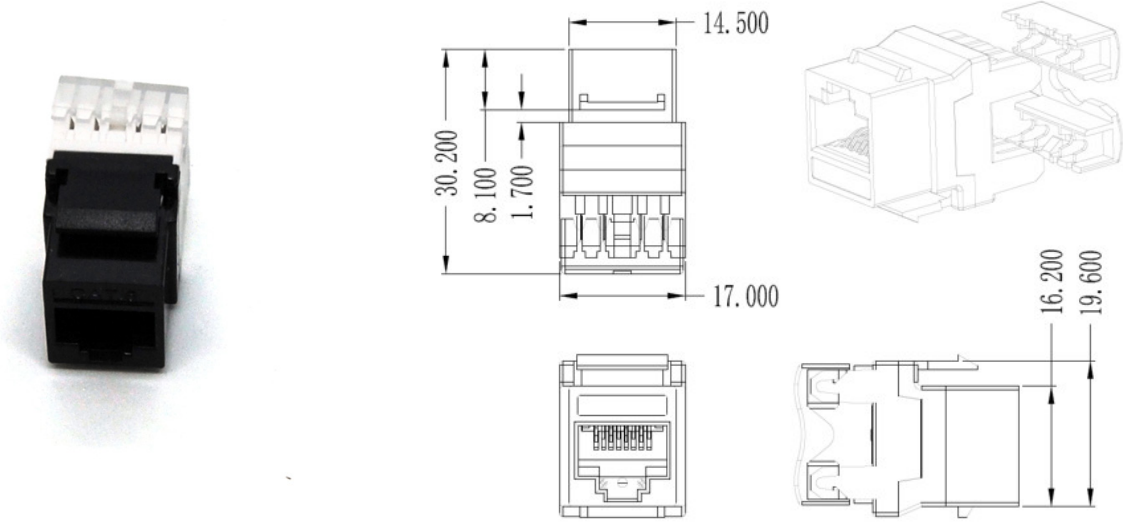

Connectors	RJ45 female (8P8C) Terminal strip for IDC connectors
Material housing	PC
Material contacts	Phosphor Bronze
Shielding class	UTP
Specification	CAT 6
Max. bandwidth	250 MHz
Contact resistance	20 mΩ max.
Rated current	1.5 A
DC resistance	0.1 Ω max.
Insulation resistance	500 MΩ min
Dielectric strength	1000 V RMS 60 Hz, 1 min
Durability plug connection	750x min. (RJ45)
	200x min. (IDC)
Suitable wire AWG	solid wire AWG 23/1-26/1 (1 / 0.45-1 / 0.58 mm)
	stranded wire AWG 24/7 (7 / 0.20-7 / 0.16 mm)
Outer diameter cable	5.0 mm - 6.0 mm
Storage temperature	-40 °C ~ +85 °C
Operating temperature	0 °C ~ +60 °C