

User's Manual

MODEL : SDH

Dear customer:

Thank you for purchasing this product. For optimum performance and safety, please read these instructions carefully before connecting, operating or adjusting this product. Please keep this manual for future reference.

The converter allows SD/HD/3G SDI signal to be converted to HDMI signal, also keeps one local SDI output.

Our devices offers solutions for noise, space and security concerns, data center control, information distribution, conference room presentation, school and corporate training environments.

Panel descriptions



- ❶ Status of power and signal
- ❷ SDI input
- ❸ SDI output

- ❹ HDMI output
- ❺ DC 5V

Features :


Support SD/HD/3G SDI input.

Support resolution 1080P@60Hz MAX

Support Equalized SDI output.

Note: Some TV sets can not support refresh rate of 24Hz,25Hz etc, we recommend that you adjust the SDI resolution to 720P@50Hz, 720P@60Hz or 1080P@50Hz, 1080P@60Hz.

Application diagram

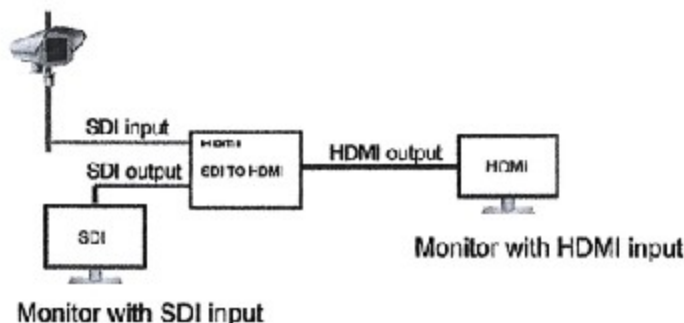

Product Specifications:

Input Interface: BNC(female)

Output Interface: BNC(female)

Output Interface : HDMI(female)

Support resolution : 480i/576i,720P@50/60Hz,1080i@50/60Hz,
1080P@24/25/30/50/60Hz

Power Supply : DC 5V/1A

Working temperature : 0~40°C

Storage temperature: -10~75°C

Shell: Aluminum shell+Laser Carving

Product size: 110*90*30mm

Packing: box

User's Manual

MODEL : HSD

Dear customer:

Thank you for purchasing this product. For optimum performance and safety, please read these instructions carefully before connecting, operating or adjusting this product. Please keep this manual for future reference.

The converter allows HDMI input to be converted to two SD/HD/3G SDI output.

Our devices offers solutions for noise, space and security concerns, data center control, information distribution, conference room presentation, school and corporate training environments.

Panel descriptions



- | | |
|--------------------|------------------------------|
| ① HD/3G SDI switch | ④ Status of power and signal |
| ② HDMI input | ⑤ SDI output |
| ③ DC 5V | |

Features :


Support SD/HD/3G SDI output

Support resolution 1080P@60Hz MAX

Support one HDMI input

Support two SDI output

Application diagram

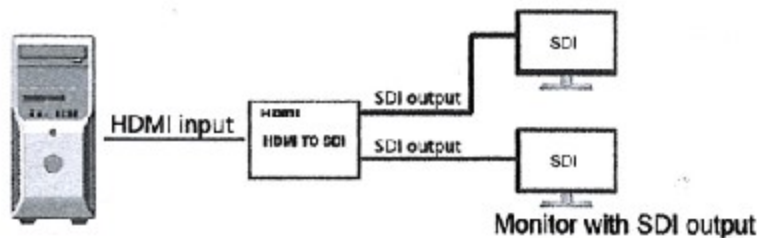

With HDMI interface signal source

Product Specifications:

Output Interface: BNC(female)

Output Interface: BNC(female)

Input Interface: HDMI(female)

Support resolution : 480i/576i, 720P@50/60Hz, 1080i@50/60Hz;
1080P@24/25/30/50/60Hz

Power Supply : DC 5V/1A

Working temperature : 0~40°C

Storage temperature: -10~75°C

Shell: Aluminum shell+Laser Carving

Product size: 110*90*30mm