


P/N	L/(mm)	T/(mm)
BC-DSP-HA-MM-10-1	10000	100
BC-DSP-HA-MM-15-1	15000	150

NOTES:

1. OPEN/SHORT/INTERMITTENCE: 100%
2. INSULATION RESISTANCE: DC 250V 0.01S 30MΩ Min
3. CONDUCTIVE RESISTANCE: 20Ω Max
4. DISPLAY RESOLUTION: 4K*2K@30Hz
5. RoHS & REACH COMPLIANT

PIN OUT

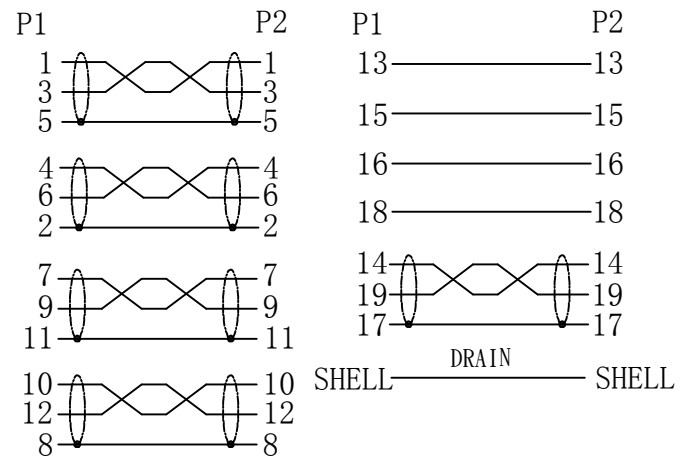

NO.	MATERIAL	DESCRIPTION	QTY.	UNIT
⑥	DUST CAP	HDMI A MALE DUST CAP / LDPE	2	PCS
⑤	FERRITE	∅17.5*28.5*∅9.5	2	PCS
④	MOLDED	45P BLACK PVC		G
③	MOLDED	LDPE		G
②	CONNECTOR	HDMI 19PIN MALE, GOLD PLATED PIN, BLACK INSULATION, GOLD PLATED SHELL	2	PCS
①	CABLE	(1/0.32CCS*1P+D+A)*5P+1/0.25CCS*4C+ADB, BLACK PVC JACKET OD: 7.3±0.2MM MARKING: High Speed HDMI Cable with Ethernet	L	MM

Ltemref	Quantity	Title/Name, designation, material, dimension etc			Article NO./Reference	
Designed by FLY	Checkde by HELEN	Approved by - date 2022.12.15	File name	Date 2022.12.15	Scale FREE	
ANGLE:				BC-DSP-HA-MM-10&15-1		
UNIT:MM					Edition 1	Sheet 1/1